



شرکت فنی مهندسی کنترل تک پیشرو در صنعت ابزار دقیق **Control Tak**

Tel: 021 66479486

## Cim 1060N

**BRASS PRESSURE REDUCER WITH MANOMETER CONNECTION - MINI SERIES - NICKEL PLATED**



This article was made in compliance with the quality management requirements of standard ISO 9001:2008.

All articles are tested according to the standard EN 12266-1:2003.

It can be used in a wide variety of sectors: drinking water distribution networks, heating systems, air conditioning, sanitary systems and generally with any non corrosive liquid.

It is guaranteed for 5 years.


It is made of a brass alloy that complies with standard EN 12165-CW617N-M.

Nominal Pressure: PN 15

Adjustment range: 1 to 4 bar

Operating temperature: 0 to 80°C


### FLOW AND PRESSURE DROP

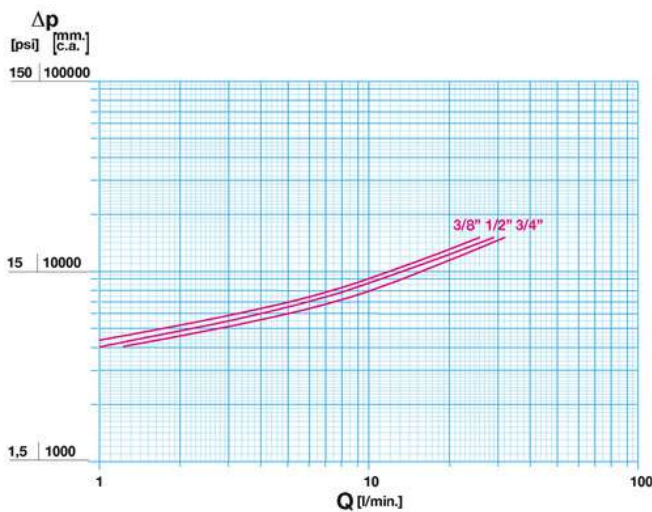

Notes:  
 1 l/min = 0,06 m<sup>3</sup>/h  
 1 m<sup>3</sup>/h = 16,67 l/min  
 1 bar = 10.000 mm w.c.  
 1 psi = 690 mm w.c.



### PRESSURE TEMPERATURE RATINGS

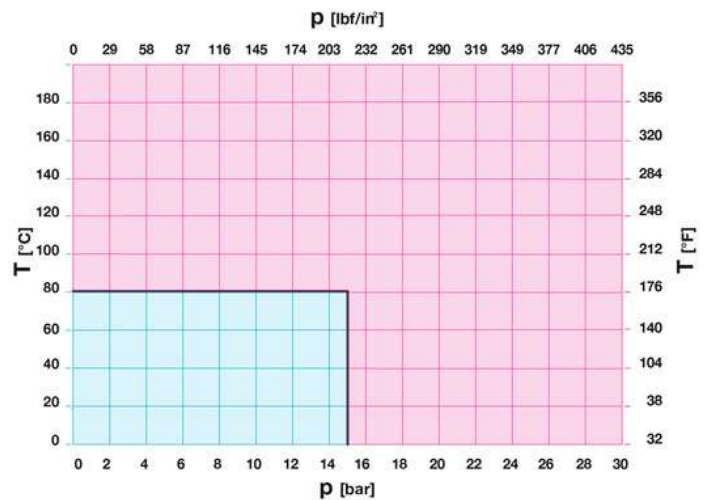

Notes:  
 1 bar = 14,5 psi  
 1 bar = 14,5 lbf/in<sup>2</sup>  
 °C = 5/9 x (°F-32)  
 °F = 32 + (9/5 x °C)

شرکت فنی مهندسی کنترل تک فعال در زمینه ی فروش ، مشاوره فنی رایگان و آموزش ابزار دقیق

Controltak@Gmail.com

WWW.CONTROLTAK.COM

@ControlTak تلگرام

Control-Tak اینستاگرام

02166479486

تماس : 09190345384

## TECHNICAL DRAWING

DN	3/8"	1/2"	3/4"
<b>Grms.</b>	<b>440</b>	<b>360</b>	<b>370</b>
A	60	60	60
B	112	112	113
CH	21	21	25

Thread:  
ISO 228

## TECHNICAL CHARACTERISTICS

### Ideal flow rates

DN	3/8"	1/2"	3/4"
Flow (l/min)	8÷12	10÷14	12÷16
Flow (m3/h)	0,5÷0,7	0,6÷0,8	0,7÷0,8

## OUR CERTIFICATIONS



شرکت فنی مهندسی کنترل تک فعال در زمینه ی فروش ، مشاوره فنی رایگان و آموزش ابزار دقیق

Controltak@gmail.com

WWW.CONTROLTAK.COM

@ControlTak

تلگرام

اینستاگرام Control-Tak

02166479486

تماس : 09190345384