

Solenoid Valve-Normally Closed Type



02166479486


0912 8448763

0919 0345384



شرکت فنی مهندسی کنترل تک پیشرو در صنعت ابزار دقیق

Product ID: UW-10~50

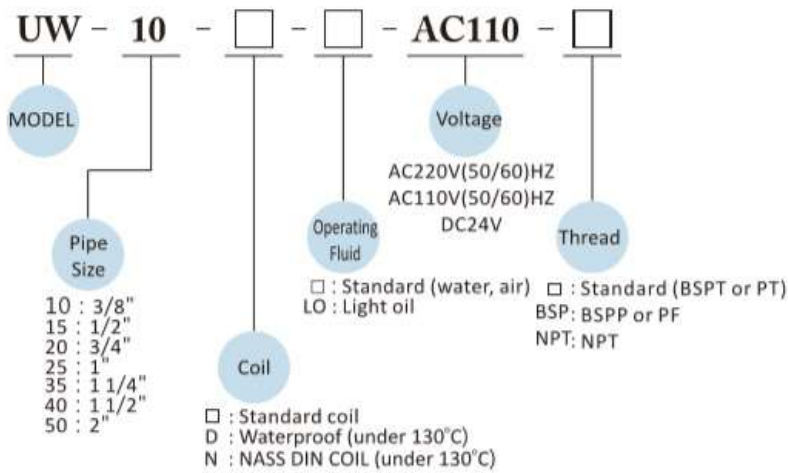

PRODUCT DESCRIPTION

- UW series is direct, multiplex, connected diaphragm, conductive and normally closed (NC) 2/2 way solenoid valve.
- Able to be operated directly under low pressure
- Availability of fluid type : water, air, light oil
- Acceptable for customization Viton (130°C) , Silicone (130°C) and EPDM (130°C)

CAUTIONS :

- Before pipelining, the pipe line must be very clean without any contaminants or any other things not ought to be existed.
- To prolong the life time of the product, Y-line filter should be installed in the front end of solenoid valve.
- AC voltage tolerance : $\pm 10\%$; DC voltage tolerance : $\pm 1\%$

تماس 24 ساعته حتی تعطیلات

021 66479486 0912 8448763 03453840919

www.Controltak.com

Controltak@gmail.com

@ Controltak تلگرام

Control-Tak اینستاگرام



02166479486

0912 8448763

0919 0345384

· It should be installed horizontally ; vertical installation is not advisable.

Not Suitable For Fluid As Below :

- Liquid status when it is high temperature ; solid status when it is cool.
- Corrosive fluid
- Viscosity over 20cst

See more complete detail

PARTS	Coil	Tube	Spring	Core	Plug	Diaphragm	Valve body
MATERIAL	Special copper wire (H class)	Stainless steel	Stainless steel	Stainless steel	NBR	NBR	Forged Brass

MODEL	Waterproof DIN/flying lead Coil	NASS DIN Coil (IP65)	PIPE SIZE	CV	ORIFICE	FLUID TEMP. (°C)	Operating Pressure kgf / cm ² (bar)			High Pressure Type		Dimension (mm)			Weight (kg)
							Water	Air	Light oil	Water	Air	L	H	D	
UW-10	●	●	3/8"	4.5	15mm	-5°C ~ +80°C	0~5	0~7	0~5	0.5~10	0.5~20	70	100	48	1.01
UW-15	●	●	1/2"	4.5	15mm	-5°C ~ +80°C	0~5	0~7	0~5	0.5~10	0.5~20	70	100	48	1
UW-20	●	●	3/4"	8.6	20mm	-5°C ~ +80°C	0~5	0~7	0~5	0.5~10	0.5~20	73	107	48	1.14
UW-25	●	●	1"	12	25mm	-5°C ~ +80°C	0~5	0~7	0~5	0.5~10	0.5~20	100	112	48	1.7
UW-35	●		1 1/4"	24	35mm	-5°C ~ +80°C	0~5	0~7	0~5	0.5~10	0.5~20	125	113	48	2.32
UW-40	●		1 1/2"	28	40mm	-5°C ~ +80°C	0~5	0~7	0~5	0.5~10	0.5~20	125	118	48	2.53
UW-50	●		2"	48	50mm	-5°C ~ +80°C	0~5	0~7	0~5	0.5~10	0.5~20	167	125	48	4.32

● High Pressure Type Use N/O Coil



Contact Detail

تماس 24 ساعته حتی تعطیلات

021 66479486- 09128448763- 09190345384

www.Controltak.com

Controltak@gmail.com

@ Controltak تلگرام

Control-Tak اینستاگرام